




VIGO PRO FILTER

FEATURES


- ✓ Laminated filter manufactured with polyester resin and fiber glass.
- ✓ Excellent exterior finish in gelcoat.
- ✓ Filter color: White
- ✓ 3/4" water drain
- ✓ 1/4" air drain
- ✓ Transparent lid with screws.
- ✓ Maximum temperature: 50°C
- ✓ Maximum pressure: 2.5 bar.
- ✓ 2" Connections for either 6-ways multiport valves or Besgo valves



FILTER DETAILS



▪ Cone diffuser

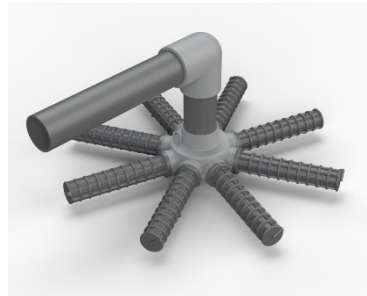

▪ 1" laterals



▪ Transparent lid with screws

Model (mm)	Connections		Filtering velocity (m³/h/m²)	Filtration Area (m²)	Flow (m³/h)	Maximum pressure (bar)	Sand (0.4-0.8mm) (kg)	Net weight (kg)	D (mm)	H (mm)	M (mm)	N (mm)
	mm	inch										
77140-0100	63	2"	50	0,19	9,5	2,5	95	15	530	830	295	230
77141-0100	63	2"	50	0,30	15	2,5	150	21	630	850	300	230
77142-0100	63	2"	50	0,44	22	2,5	290	30	780	945	335	230

Model (mm)	Box dimensión (cm)	Palet dimensión (cm)	Units per pallet
500	56 x56 x 85	120 x 120 x 185	8
600	70 x 70 x 87	140 x 140 x 190	8
750	80 x 80 x 104	80 x 80 x 201	2

